



Vanity with Doors

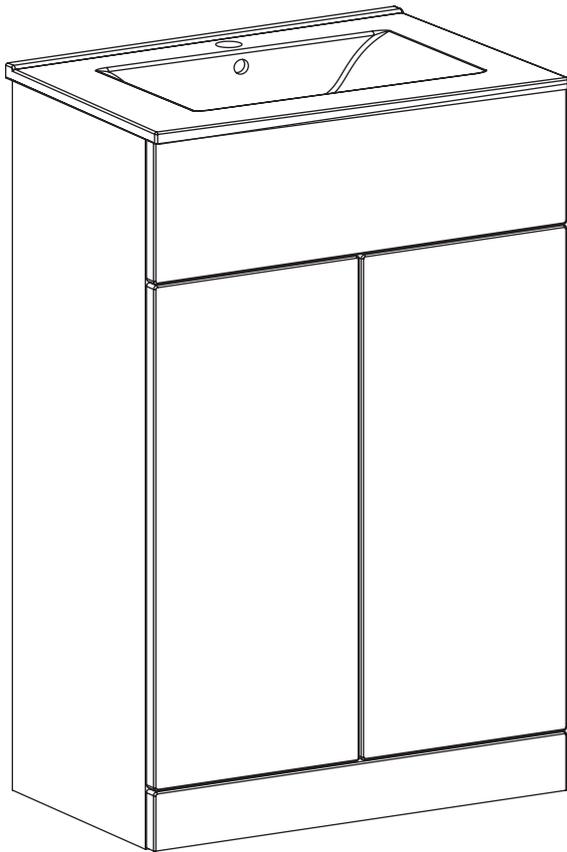

Images for illustration purposes only

Components


1 x Carcass

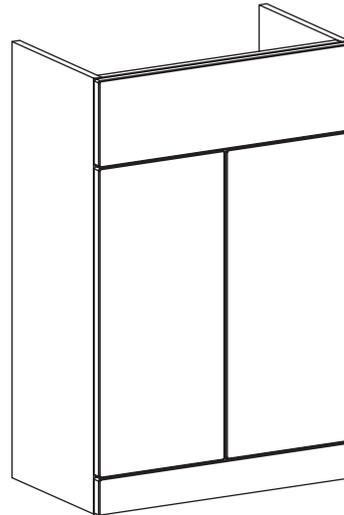

4 x Shelf Peg



4 x Hole Plug




2 x Wall Brackets

Tools Required (NOT Supplied)

Drill and drill bits

Required when securing the cabinet to a wall. Use an appropriate size drill bit to match the wall fixing chosen (wall screws and fixings not supplied).




Cross Head Screwdriver



Pencil



Sealant Gun



Spirit Level



Tape Measure

Before you start carefully read the instructions.

Check the pack and make sure all the components are included. When you are ready to start make sure you have the right tools to hand, plenty of space and a clean dry area for building. Don't rush, read the instructions first and run through them before you begin.

Keep fittings together to avoid loss. Do not overtighten screws or bolts.

CLEANING Use mild soap and water only. Do not use washing powders or any other types of abrasive cleaner. See aftercare instructions.

IMPORTANT


If you are unsure of any part of the instructions shown in this document we recommend that you contact a reputable qualified trades person.

If a part is missing or damaged, please call 01535 613830. Please have your instruction guide ready.




W30/447 070220

1

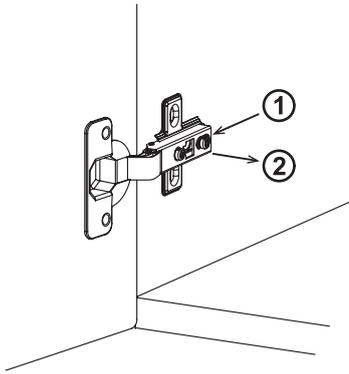

Remove any doors as shown, pushing the clip to the rear of each hinge and lifting away from the base plate. Make sure the door is supported when unclipping each hinge.


2



When you are happy with the position of the cabinet, using suitable wall fixings (not supplied), fix the cabinet to the wall through the brackets.


3

Mark out and drill the positions for the handles. It is recommended to put a scrap piece of wood under the door to prevent breakout. Attach the handles.

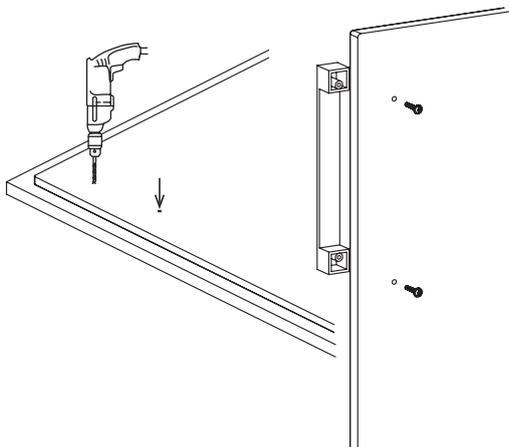


4

Attach the door back to the unit. Line the hinge up with the base plate (1), and push the back of the hinge until it clicks into place (2).




The door can be adjusted following the illustration below.

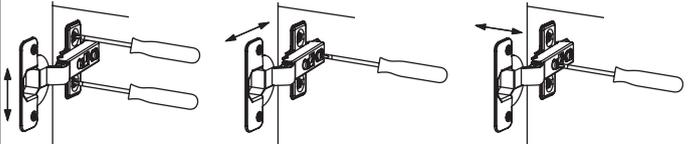


400 Vanity only

To switch which hand the door opens, fully unscrew the hinge plates from the carcass, as show in the above vertical adjustment, and reattach to the opposite end panel. Adjust as necessary. Insert hole plugs in remaining holes.



5

Insert shelf pegs and lower shelf into position.



6

Silicone around the top of the unit and lower the basin into position. You may wish to also silicone where the unit and the basin meet the wall, and where the basin meets the worktop.

We recommend that you read the sealant packaging for the curing time. Do not use until the sealant is set.

