
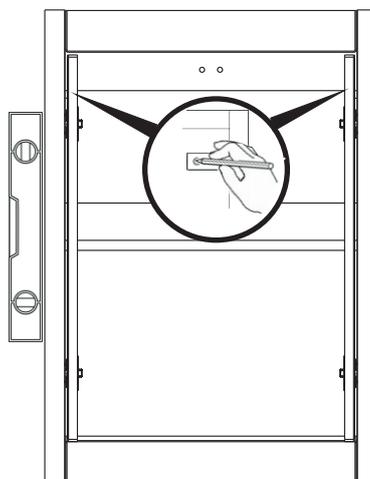
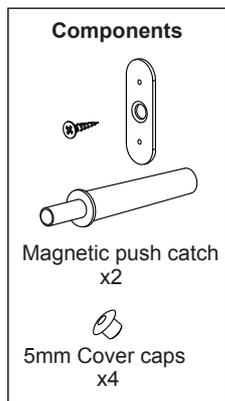


Bathroom Vanity Cabinet Installation Guide.



Note: the images shown may not match your cabinet. Images are for *reference purposes* only.

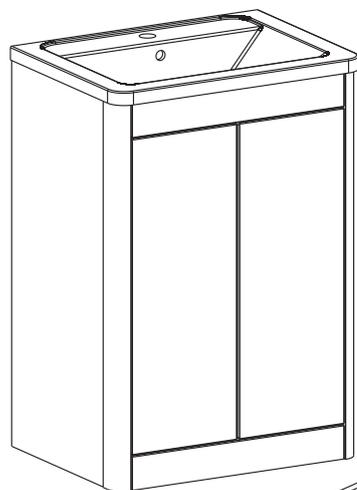

Using a pencil carefully mark out the wall fixing positions as shown. When you are happy with this, remove the cabinet and using a drill with a suitable drill bit, drill the marked positions ready to accept your chosen wall fixings. Please note wall fixings not supplied. When fixing the cabinet back to the wall check for level and plumb again by using a spirit level.

NOTE:- It is good practice to fit all pipework and plumbing before fixing the unit to the wall to enable easier installation and fitting.

Screw the metal plate to the rear of the door directly behind the piston as shown. Do this for both doors.

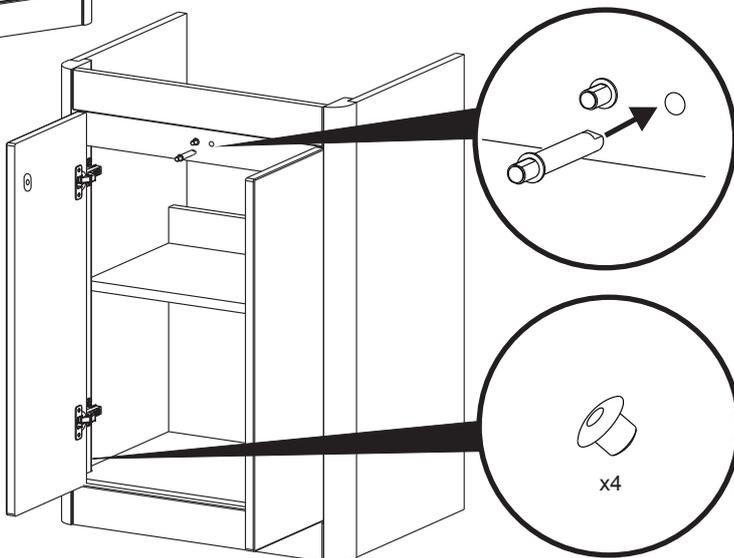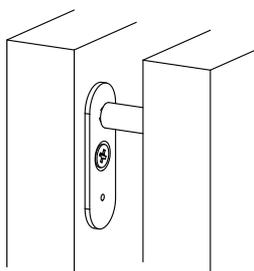

It is good practice to seal both ends on both posts with a good quality sealant.




Fit both magnetic push mechanisms to the support rail by gently pushing them into place as shown.

Please note the piston length can be adjusted by turning it clockwise or anti clockwise to suit the doors position.


Fit 4x 5mm cover caps to the base of the curved posts as shown by gently pushing them into place. 2 Per side.

IMPORTANT If you make cuts to any of the panels, make sure that you seal any raw edges after cutting with a water repellant sealant to prevent water ingress.

Tools required (Not supplied)

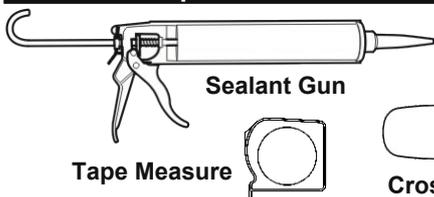

Drill and drill bits
Required when securing the cabinet to a wall. Use an appropriate size bit to match the wall fixing chosen (wall screws and fixings not supplied)



Before you start carefully read the instructions.

Check the pack and make sure all the components are included. When you are ready to start make sure you have the right tools to hand, plenty of space and a clean dry area for building. Don't rush, read the instructions first and run through the assembly sequence before you begin.

Assemble should be done in the stages shown in the following diagrams, constructing one unit at a time and keeping fittings together to avoid loss. Do not over tighten screws or bolts.

CLEANING Use mild soap and water only. Do not use washing powders or any other types of abrasive cleaner. See aftercare instructions.



If a part is missing or damaged, please call the number shown below. Please have your assembly guide ready.

Cavalier Marketing Ltd,
North Dean Road,
West Lane,
Keighley, BD22 6QY.

t : 01535 613830
f : 01535 613831

www.cavalierbathrooms.co.uk


W30/328 13/03/15

The hinges can be adjusted by following the instructions below therefore allowing you to align the door with the unit.


To adjust the door in and out on the unit loosen the screw as illustrated on both of the hinges and move the door to the required position.

To adjust the door up and down on the unit, loosen both screws as shown on both hinges and move the door to the required position. Re-tighten all screws after.

To adjust the door left & right on the unit, turn the screw as illustrated on both hinges.

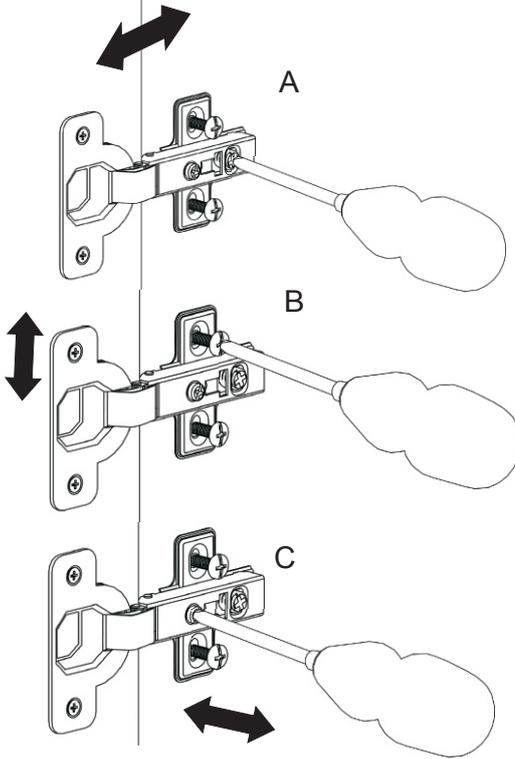


Please note, you may need to remove the protective film from all the glass panels.

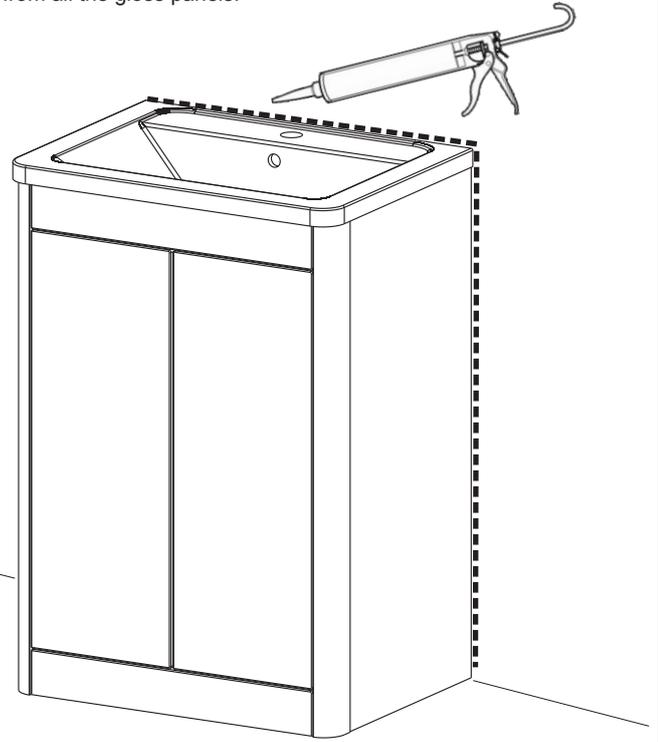

You may also wish to seal where the cabinet and basin meet the wall with a neat smooth bead of sealant as shown opposite.

Fitting the basin to the unit.

Bed the basin to the top of the cabinet on a bead of silicone sealant as shown and allow to fully cure. This will hold the basin securely in place when fully cured. Ensure that there is equal overhang to both sides and that the basin is flush to the back of the unit.

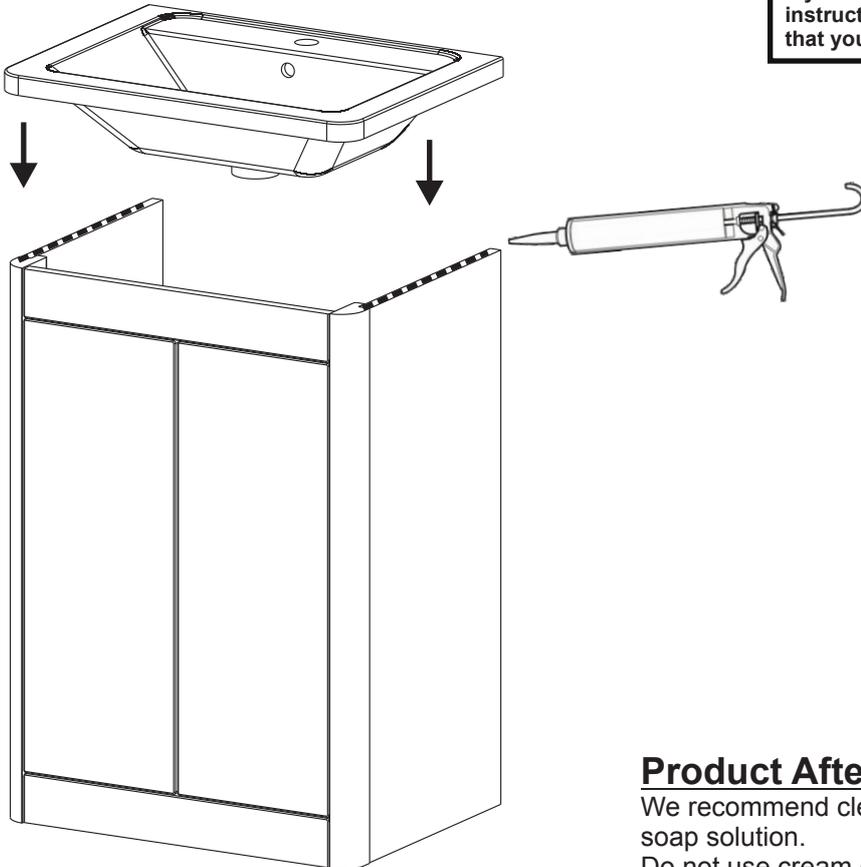

IMPORTANT

If you are at all unsure of any part of the instructions shown in the guide, we recommend that you contact a reputable qualified trades person.

IMPORTANT

We recommend that you read the sealant packaging for the curing time. Do not use the unit until the sealant is set. Please consult with an expert if you are unsure. We recommend that a qualified trades person is used for all plumbing work.

Product Aftercare.

We recommend cleaning with a soft damp cloth and mild soap solution.
Do not use cream cleaners or cleaners containing bleach.
Do not scrub or scour.
Do not use abrasive cleaning agents.
Do not use solvent based cleaners
If a polish is to be used, use a wax free polish.
Do not allow pools of water to remain standing on the surfaces.