


# Bathroom Wall Hung Cabinet Installation Guide.


Note: the images shown may not match your cabinet. Images are for *reference purposes* only.

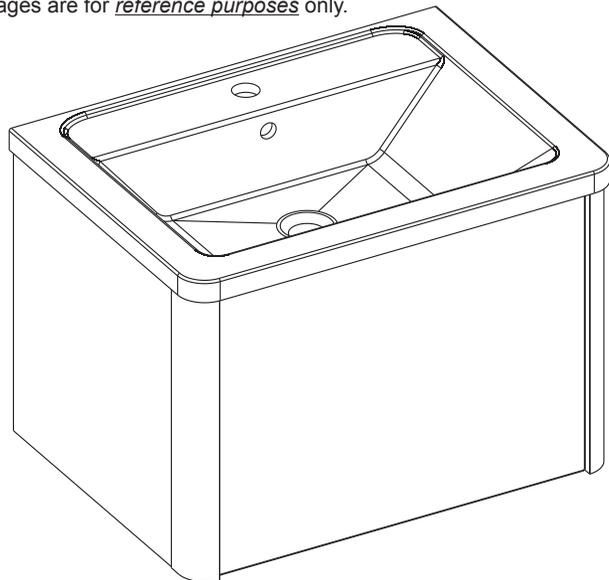

## Components

1 x LH Wall Cabinet Hanger & Cover  
1 x RH Wall Cabinet Hanger & Cover

2 x Wall Fixing Plates  
(Fixings not supplied)




1

Remove the wall cabinet hangers from the packaging and fit them to the correct corresponding sides of the cabinet. The cabinet hangers are fitted to the sides of the cabinet by using a cross headed screwdriver and the fixing screws supplied with the cabinet hangers as shown below.

Make sure both wall cabinet hangers are securely fixed into position as shown below. Do not over tighten the fixings.

It is good practice to seal the ends at the bottom on both posts with a good quality sealant.

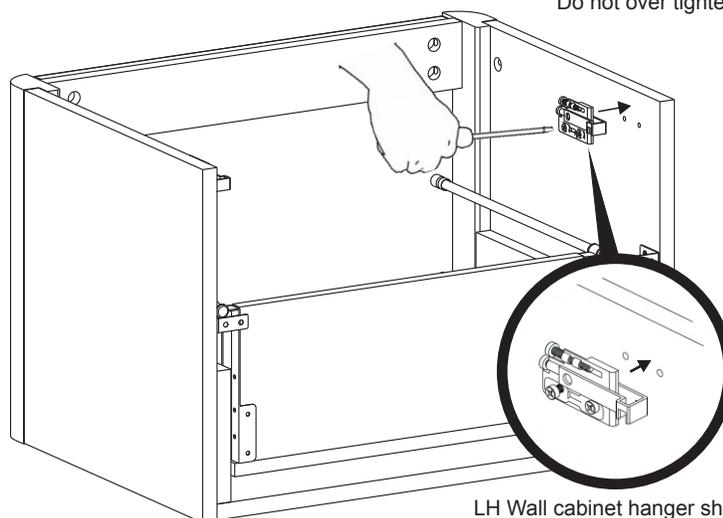


LH Wall cabinet hanger shown

## Tools required (Not supplied)



Sealant Gun

Tape Measure



Spirit level



Cross headed screwdriver

Pencil

### Drill and drill bits

Required when securing the cabinet to a wall. Use an appropriate size bit to match the wall fixing chosen (wall screws and fixings not supplied)



## Before you start carefully read the instructions.

Check the pack and make sure all the components are included. When you are ready to start make sure you have the right tools to hand, plenty of space and a clean dry area for building. Don't rush, read the instructions first and run through the assembly sequence before you begin.

Assembly should be done in the stages shown in the following diagrams, constructing one unit at a time and keeping fittings together to avoid loss. Do not over tighten screws or bolts.

**CLEANING** Use mild soap and water only. Do not use washing powders or any other types of abrasive cleaner. See aftercare instructions.



If a part is missing or damaged, please call the number shown below. Please have your assembly guide ready.

Cavalier Marketing Ltd,  
North Dean Road,  
West Lane,  
Keighley, BD22 6QY.


t : 01535 613830  
f : 01535 613831

[www.cavalierbathrooms.co.uk](http://www.cavalierbathrooms.co.uk)


W30/329 04/04/14

2

Using a tape measure, measure the internal distance between both end panels of the unit to establish the distance between the wall fixing plates and replicate this position onto the wall using a pencil at the required height you intend your cabinet and basin to finish at.

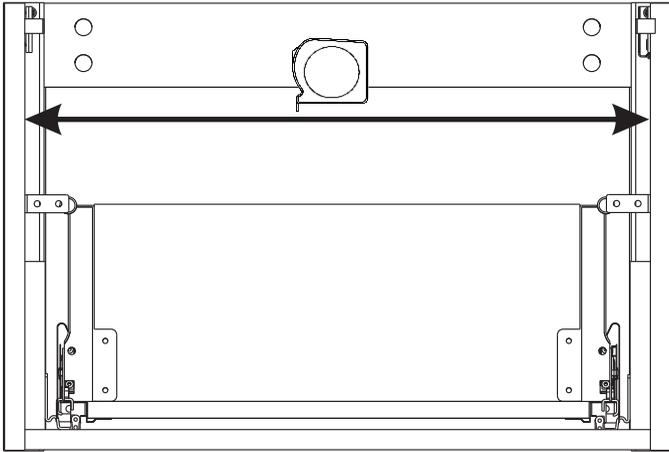

3

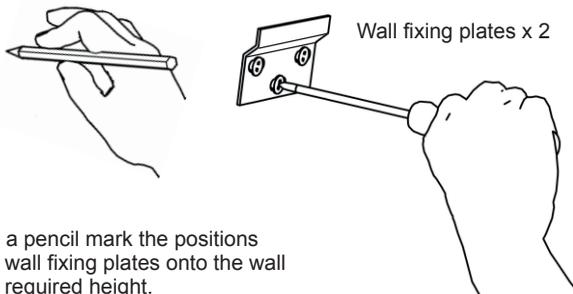


Using a pencil mark the positions of the wall fixing plates onto the wall at the required height.

Ensure that the distance between the outside edges of the wall fixing plates is the same as the distance measured above.

After marking out, fix the wall fixing plates onto the wall using the correct type of wall fixings to suit the type of wall you are fixing to. Please note wall fixings are not supplied as wall types may vary. If you are fixing onto a dry boarded constructed type wall, you will need to ensure that the fixings can be securely held in place by some kind of solid framework etc. If you are at all unsure please contact a reputable trades person for professional advice.

4


Gently lift the cabinet into position as shown below so that the cabinet hangers sit onto the wall brackets. Make sure that the cabinet is securely held in place before letting go.

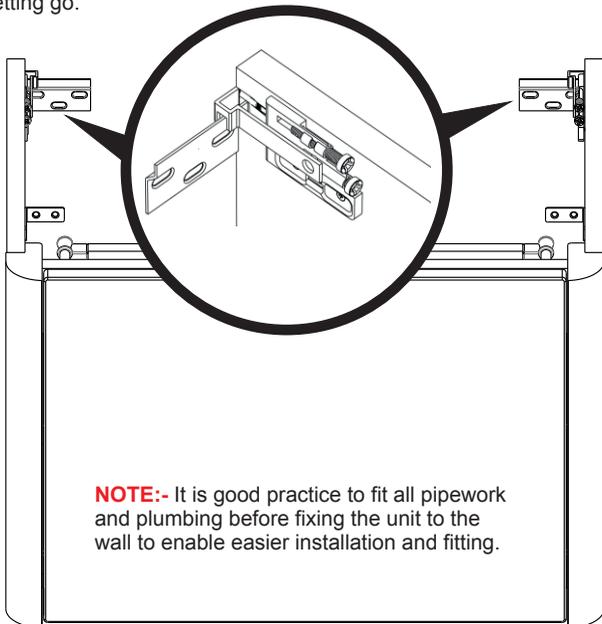


**NOTE:-** It is good practice to fit all pipework and plumbing before fixing the unit to the wall to enable easier installation and fitting.

5

Check the cabinet is level and plumb by using a spirit level as shown above. Adjustments can be made by following the instructions below. When all adjustments have been made check once more for level and plumb using the level.

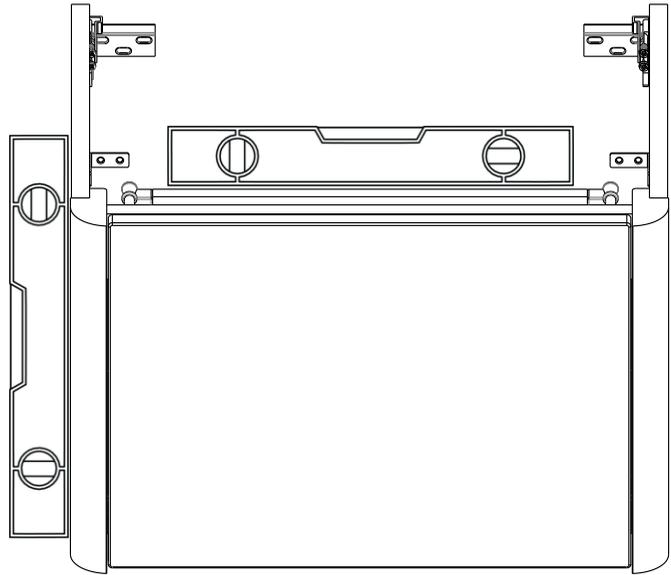


6

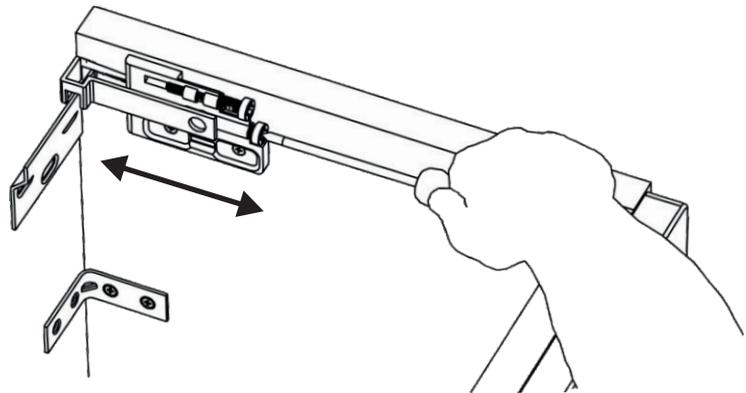


To secure the cabinet to the wall this is achieved by using a cross headed screwdriver and turning the bottom screw as shown, clockwise until the cabinet is secured, in place.

7

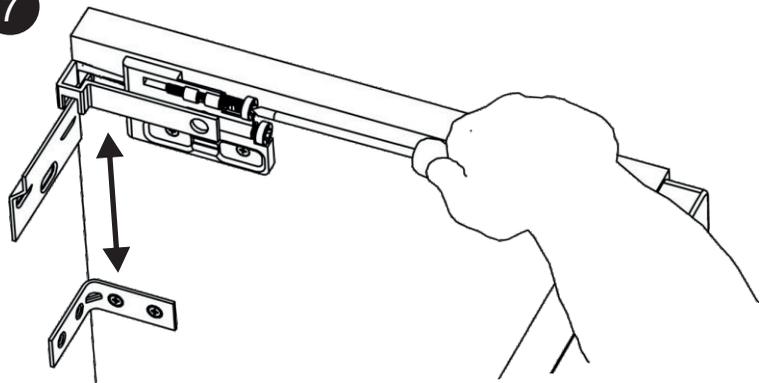


For vertical adjustment this can be achieved by using a cross headed screwdriver and turning the top screw as shown, either clockwise or anti clock, to level the cabinet.

8

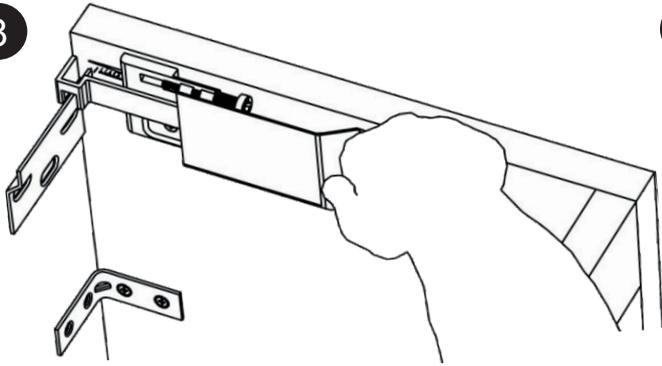


When you are happy that the cabinet is plumb and level and all final adjustments have been made, carefully slide the chrome covers over both of the cabinet hangers. If further adjustments are required, then simply slide the cover back off to expose the adjusting screws.

9

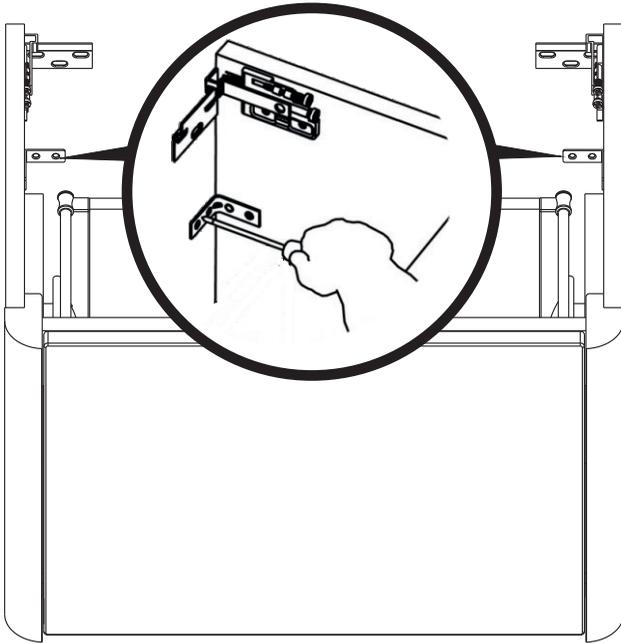


When you are happy with the position of the cabinet, using suitable wall fixings, fix the cabinet to the wall by securing the L-shaped brackets as shown. Please note wall fixings not supplied.

It is recommended that you remove the drawer kit firstly to allow easier access. This is done by fully opening and extending the drawer unit as far as it will go. With both hands at each side of the drawer unit reach under the base of the drawer sides at the front and feel for the release mechanisms. Push the plastic clips inwards and at the same time lift the drawer unit up clear of the runners.

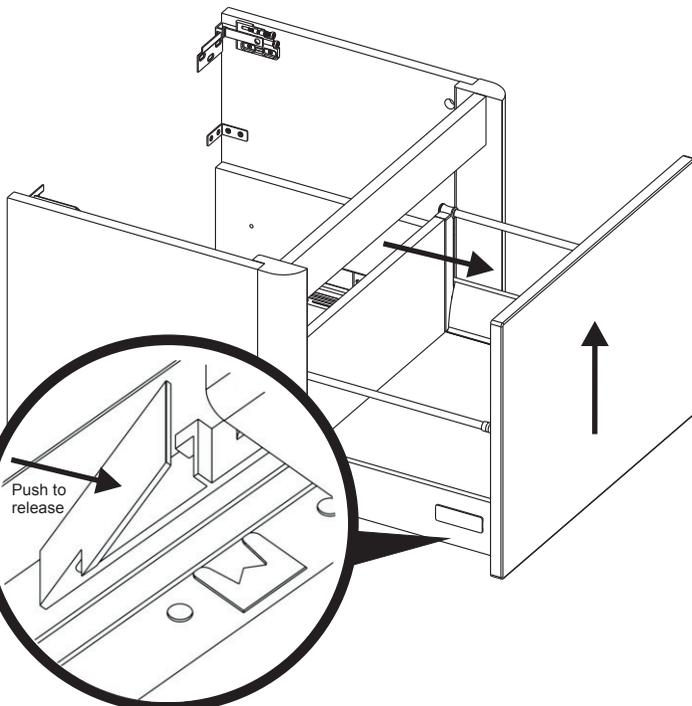


10

To re-attach the drawer to the cabinet, firstly extend the drawer runners as shown below. Secondly lower the drawer onto the drawer runners and push close until it locks into position.

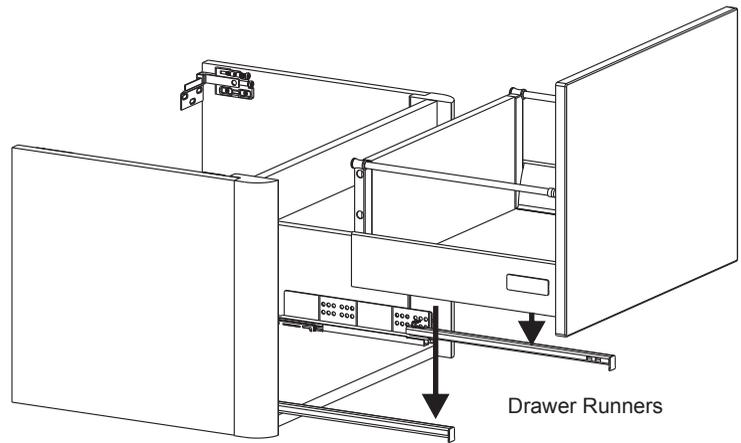


11

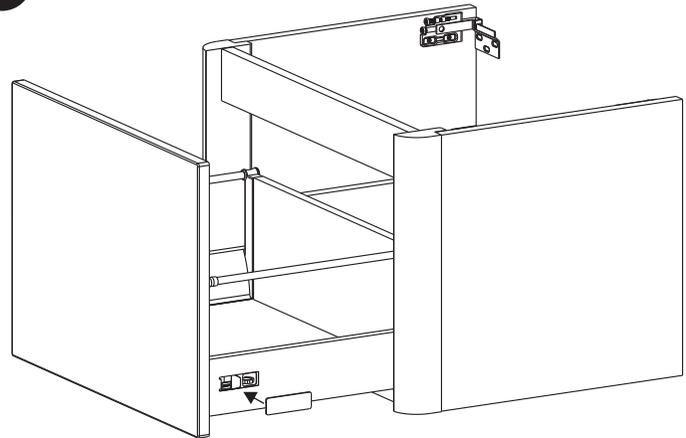


If you need to adjust the drawer unit this can be achieved by removing the plastic cover caps from the drawer sides to reveal the adjustment wheel and screw. Please follow the diagrams below to adjust the drawer in both the vertical and horizontal planes. Please note horizontal adjustment can only be made from the RH drawer side.

When adjustment has been made replace the plastic cover caps by gently pushing back into place.

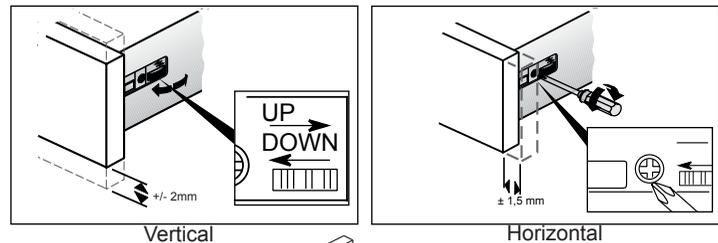


12

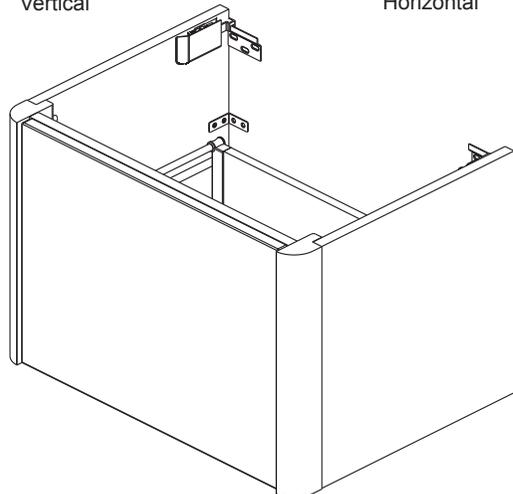

To open the drawer press in the middle of the drawer front. This will release the drawer mechanism. When closing simply push the drawer unit forward until it locks into position.

## Fitting the basin to the unit.

Bed the basin to the top of the cabinet on a bead of silicone sealant as shown and allow to fully cure. This will hold the basin securely in place when fully cured. Ensure that there is equal overhang to both sides and that the basin is flush to the back of the unit.

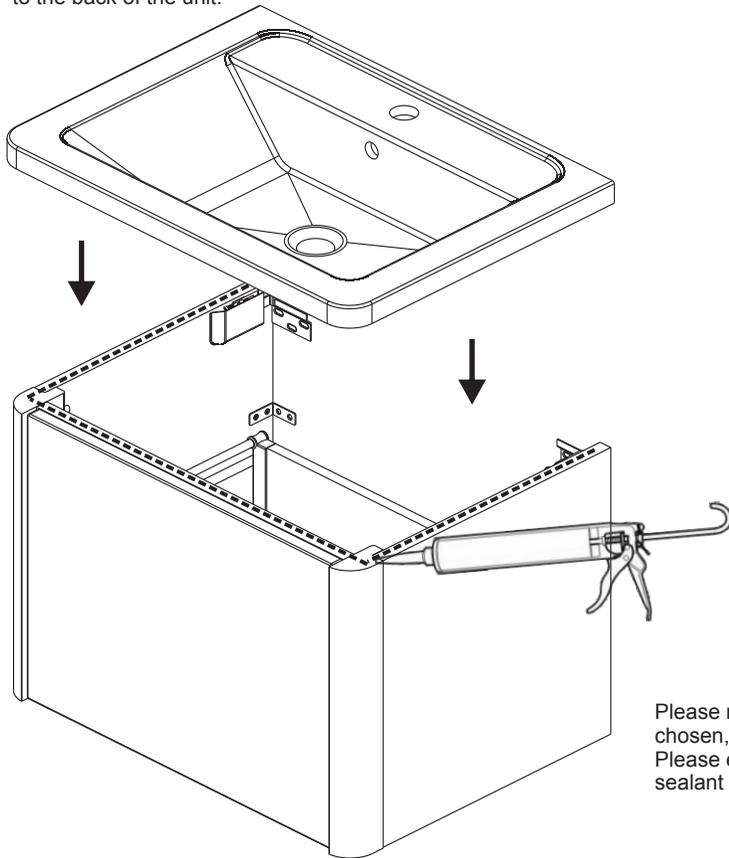

Please note, you may need to remove the protective film from all the gloss panels.

## Product Aftercare.

We recommend cleaning with a soft damp cloth and mild soap solution.  
Do not use cream cleaners or cleaners containing bleach.  
Do not scrub or scour.  
Do not use abrasive cleaning agents.  
Do not use solvent based cleaners  
If a polish is to be used, use a wax free polish.  
Do not allow pools of water to remain standing on the surfaces.


### IMPORTANT

If you are at all unsure of any part of the instructions shown in this booklet we recommend that you contact a reputable qualified trades person.

Please note, dependant upon the type of waste you have chosen, you may need to trim the rear of the drawer to suit. Please ensure all raw edges are sealed with a good quality sealant to prevent any moisture ingress.

### IMPORTANT

We recommend that you read the sealant packaging for the curing time. Do not use the unit until the sealant is set. Please consult with an expert if you are unsure. We recommend that a qualified trades person is used for all plumbing work.

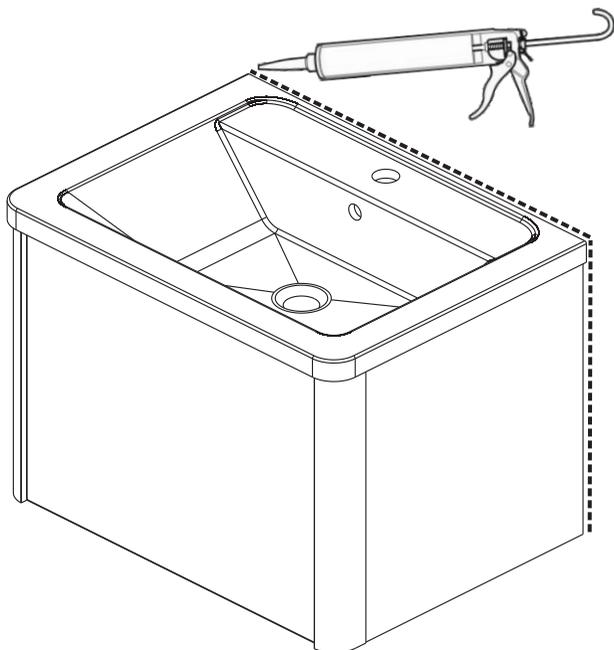

You may also wish to seal where the vanity and basin meet the wall with a neat smooth bead of sealant as shown above.