



450 Vanity Unit

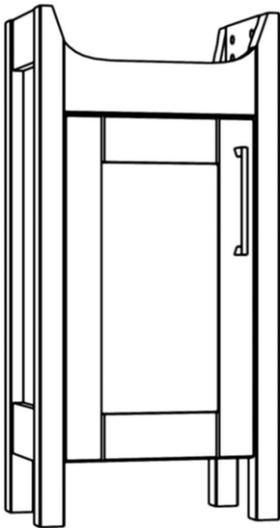


(Left Hand Open Shown).

650 Vanity Unit

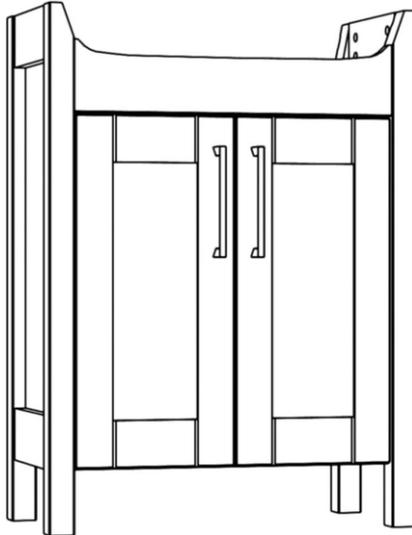


450 & 650 Mirror

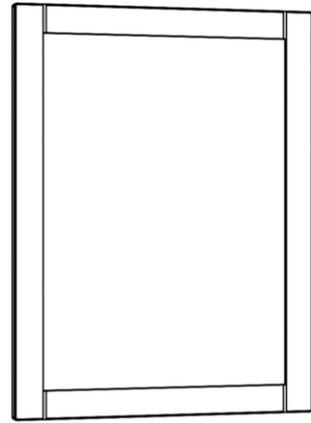

(Note: Mirror can be hung both horizontally and vertically).


Tower Unit

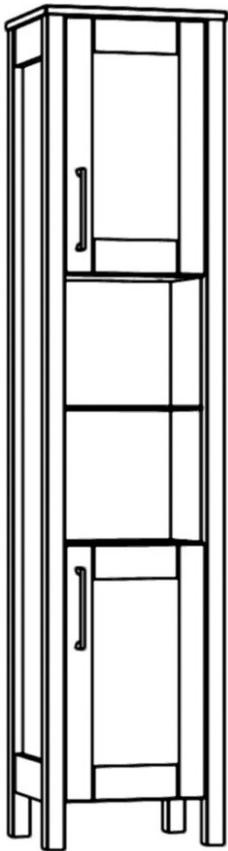

(Right Hand Open Shown).

Fittings Supplied

Handles:
x1 (450 Vanity Unit Only)
x2 (650 Vanity Unit & Tower Unit Only)

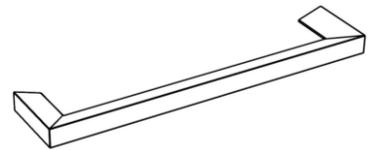

Handle Bolts:
x2 (450 Vanity Unit Only)
x4 (650 Vanity Unit & Tower Unit Only)



L-Shaped Bracket x2 (450 & 650 Vanity Only)



12mm Woodscrews x4 (450 & 650 Vanity Only)



5mm Cover Caps (450 Vanity & Tower Unit Only)




15mm Cover Caps (450 Vanity & Tower Unit Only)



Note: wall fixings not supplied.

Images shown are for fitting reference only.


Tools required (not supplied)



Cross head screwdriver



Bradawl


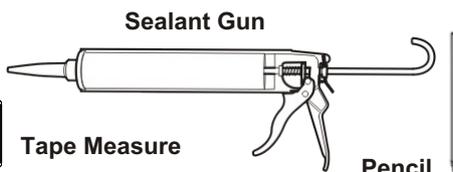


Sealant Gun

Tape Measure

Pencil

Drill and drill bits
Required when securing the cabinet to a wall. Use an appropriate size bit to match the wall fixing chosen (wall screws and fixings not supplied)



Spirit level




Before you start carefully read the instructions.

Check the pack and make sure all the components are included. When you are ready to start make sure you have the right tools to hand, plenty of space and a clean dry area for building. Don't rush, read the instructions first and run through them before you begin.

Keep fittings together to avoid loss. Do not over tighten screws or bolts.


CLEANING Use mild soap and water only. Do not use washing powders or any other types of abrasive cleaner. See aftercare instructions.

STOP If a part is missing or damaged, please call 01535 613 830. Please have your instruction guide ready.

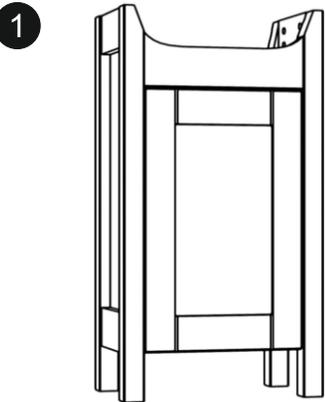


1


Before fixing the handle to the door, decide which hand you would like your chosen unit to open from. If you choose to hand the door on the opposite side to how the unit came, simply unscrew the 2 screws on both hinge plates, as shown, until the door comes loose with the hinge and hinge plate fully attached. Be careful not to damage the door when handling. Reattach the door by aligning the screws in the hinge plate with the pre-drilled holes on the chosen end panel and screwing them in. Make sure that all screws are secured. Fit the relevant amount of 5mm cover caps into the exposed holes on the unhinged end panel.

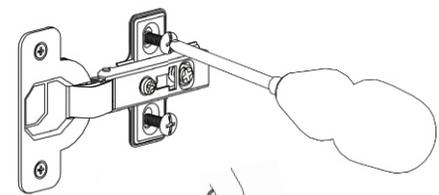

2 To fit the handle follow the template provided. Mark the door on the hinged face. Place a scrap piece of board behind the door to prevent any excessive breaking out.

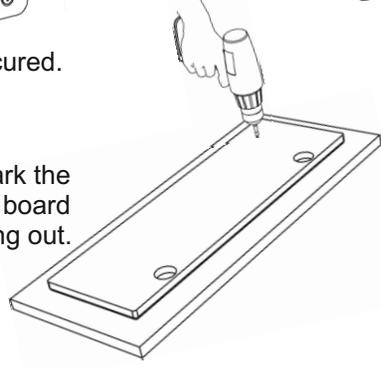


3 When you have marked and drilled the positions for the handles, use 2x handle bolts to attach the handle. When the handle has been fitted reattach the door to the unit.





To adjust the hinges follow the processes below.



A To adjust the door in and out on the cabinet, loosen the screw, as shown below, and move the door to required position. Once you are happy with the position, re-tighten the screw.

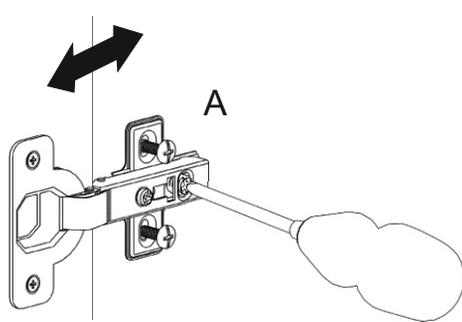

4 If you would like to make the vanity units captive, simply screw the I-shape brackets provided onto the two back legs at a suitable height using 2x 12mm woodscrews per bracket. Note: before attaching the brackets, ensure that they will not foul on any part of the basin when sat on the unit. When you are happy with the unit fix the unit to the wall using suitable fixings. Use a spirit level to ensure that the unit is level and plumb.

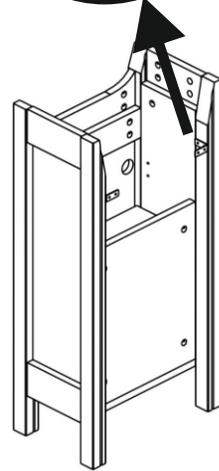


B To adjust the door up and down on the cabinet, loosen both screws as illustrated on all hinges on the cabinet and move the door to the required position. Re-tighten all screws after.

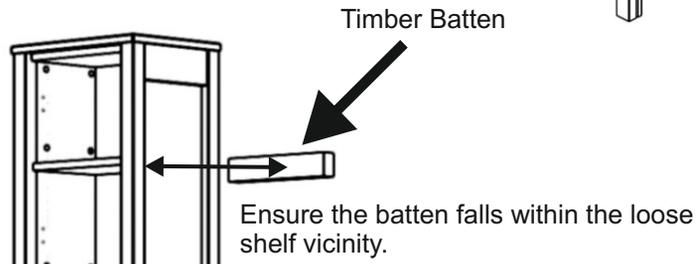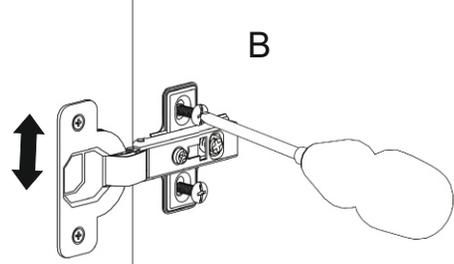


Ensure the batten falls within the loose shelf vicinity.

C To adjust the door from side to side on the cabinet, turn the screw as illustrated on both of the hinges and move the door to the required position

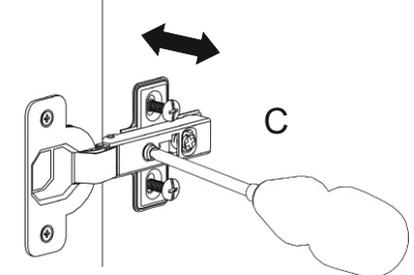

If you would like to make the tower unit captive, fix a timber batten to the wall to bridge the gap between the unit and the wall. Ensure that when fixing the batten, it falls within the vicinity of the loose shelf in the top section of the unit. When you have fixed the batten, mark out two equal positions behind where the loose shelf fits in the top section of the unit. Using suitable fixings, follow these positions to attach the unit to the wall.

5

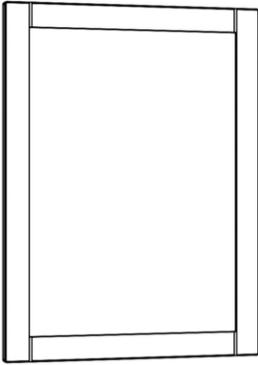

Note: Mirror can be position either horizontally or vertically to suit.

To fix the mirror to the wall with the grain going vertically, measure the distance between the keyhole fixings in positions B, as noted below. Replicate these measurements to the required positions on the wall at the required height.

To fix the mirror to the wall with the grain going horizontally, follow the same process but measure the distance between the keyhole fixings in positions A.

Note: before commencing with attaching fittings to the wall, double check all marked positions to ensure that you are happy with the positions.



Using a drill and a suitable drill bit, drill two holes at the positions marked on the wall ready to receive the wall fixings.

Note: wall fixings not supplied.

Fix two screws into the fixings at both points, leaving the screw head proud enough to securely receive the mirror.

When you have screwed the fixings to the wall, place the mirror onto the wall, aligning the wall fixings with the keyhole fittings in the mirror.

Use a spirit level to check that the mirror is level and plumb, as shown below.

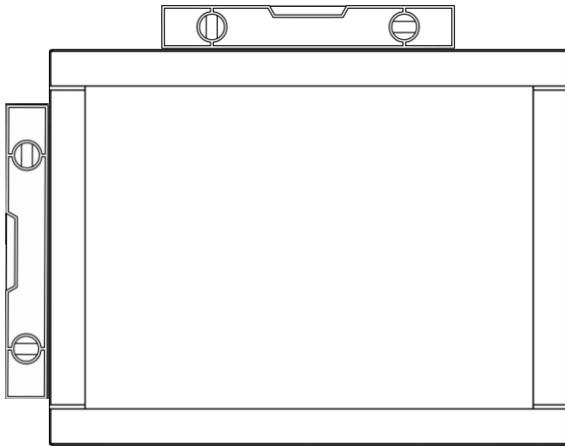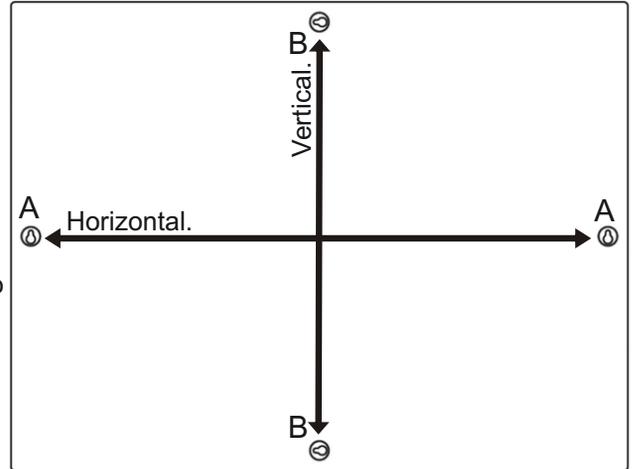

6

Bed the basin to the top of the vanity on a bead of silicone sealant as shown and allow to fully cure. This will hold the basin securely in place when fully cured.

You may also wish to seal where the cabinet and basin meet the wall with a neat smooth bead of sealant.

IMPORTANT

We recommend that you read the sealant packaging for the curing time. Do not use the unit until the sealant is set. Please consult with an expert if you are unsure.

We recommend that a qualified trades person is used for all plumbing work.

If you are at all unsure of any part of the instructions shown we recommend that you contact a reputable qualified trades person.

Product Aftercare.

We recommend cleaning with a soft damp cloth and mild soap solution.

Do not use cream cleaners or cleaners containing bleach.

Do not scrub or scour.

Do not use abrasive cleaning agents.

Do not use solvent based cleaners

If a polish is to be used, use a wax free polish.

Do not allow pools of water to remain standing on the surfaces.

